Neptun.20 - Product Specification



Univers - Classics among rope playground equipment

Net structures offer hours of fun and adventure on several levels – climbing and swinging, up and down, horizontally and vertically – space on earth.

The original spatial nets: Born over 40 years ago as a play concept, continuously further developed in form and detail, still popular even after several generations.

Neptun.20 - At a glance.

Product Family: Univers Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height: Protective Surfacing Area (DIN EN 1176):

Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487:

90.141.211 1.85 m (6'-1") 15.4 m x 7.4 m x 5.7 m (50'-6"x 19'-9" x 18'-5")

10.6 m x 18.8 m 16.6 m x 10.7 m (54'-6" x 35'-2")

166.0 m²

176.4 m² (1,898.8 sf)

Number of Foundations: Concrete Volume C20/C25: Number of skilled installers required: Installation Time without foundation: Dimensions of largest part:

Weight of heaviest part: Shipping Volume: Spare part guarantee:

7 pc.

2.7 m3 (95.4 ft3)

8 hours

 $9.0 \, \text{m} \times 0.8 \, \text{m} \times 0.8 \, \text{m}$ (29'-7" x 2'-8" x 2'-8") 160 kg (353 lbs) **Upon request** Lifelong






Berliner Seilfabrik Play Equipment Corporation 96 Brookfield Oaks Drive, Suite 140 Greenville, SC 29607

T + 1864 627 1092 F + 1 864 627 1178

www.berliner-playequipment.com info@berliner-seilfabrik.com Revision: April 2016

Neptun.20 - Product Specification

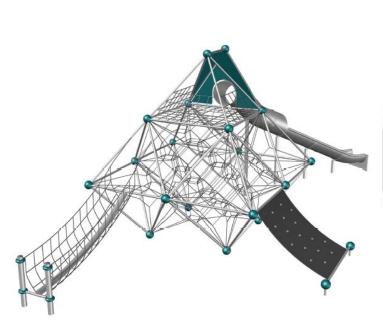

Technical Data.

The following text can also be used for tenders.

- Neptun
- Jungle bridge
- Rubber ramp
- Curved tube slide

Members:

Frameworx®-steel tubes, \varnothing 2 3/8" (60.3 mm); anticorrosion treatment and color finish: sandblasting and epoxy-/polyester-powdercoating.

Nodes:

Frameworx®-aluminum ball connectors, \varnothing 9-13/16" (250 mm); anticorrosion treatment and color finish: sandblasting and epoxy-/polyester-powdercoating; incorporating the unique Astem TT net tensioning system, securely closed with durable ebonite caps.

Ropes:

U-Rope®-round strand ropes with galvanized steel cores, \varnothing 5/8" (16 mm); external strands are covered with high abrasion resistant and UV-resistant polyester-yarn.

Spatial netting:

Rope crossing points localized by durable, drop forged aluminum-cloverleaf rings; in situ-replaceable rope lines (no special tools required).

Planar netting:

Rope crossing points localized by durable, drop forged aluminum-ballknots (no plastic).

Posts:


Steel pipes Ø 133 mm (5 1 '); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process



Berliner Seilfabrik Play Equipment Corporation 96 Brookfield Oaks Drive, Suite 140 Greenville, SC 29607

T + 1 864 627 1092 F + 1 864 627 1178



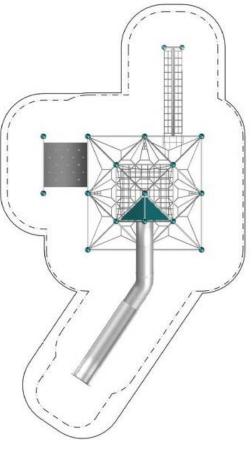

HDPE Panels:

HDPE plates as wall panels made of abrasion-proofed plastic (t=19mm; t=3/4").

Curved slide:

Attached to one of the entrance panels, comprised of plastic or stainless steel AlSI304 (DIN 1.4301) with curve

Rubber ramp:

Rubber comprised of durable, vandal-resistant conveyor belt material; rope Ø 16 mm (5/8"); climbing handles: HDPE

Jungle bridge:

Revision: April 2016

Bridge with thick walk rope comprised of Polypropylene-cordage, Ø 150 mm (5 7/8"); with steelcore Ø 12 mm (1/2"), external PP-winding and ends durable stabilized with shrink-rubber sleeves at regular intervals; net comprised of rope Ø 16 mm (5/8"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic)

