

Venus – Product Specification



Univers – Classics among rope playground equipment

Net structures offer hours of fun and adventure on several levels – climbing and swinging, up and down, horizontally and vertically – space on earth.

The original spatial nets: Born over 40 years ago as a play concept, continuously further developed in form and detail, still popular even after several generations.

Venus – at a glance.



Product Family:	Univers	Number of Foundations:	4 pc.
Item Number:	90.100.020	Concrete Volume C20/C25:	0,85 m³ (30 ft³)
Children's Age:	5+	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	2.09 m (6'-11")	Installation Time without foundation:	4 hours
Length x Width x Height:	4.4 m x 4.4 m x 4.1 m (14'-5" x 14'-5" x 14'-0")	Dimensions of largest part:	ø 0.1 m x 2.7 m (Ø 4' x 8'-10")
Protective Surfacing Area (DIN EN 1176):	8.2 m x 8.2 m	Weight of heaviest part:	100 kg (220 lbs)
Protective Surfacing Area (ASTM 1487):	8.1 m x 8.1 m (26'-5" x 26'-5")	Shipping Volume:	1,4 m³ (49.4 lbs)
Minimum space required DIN EN 1176:	63.3 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	61.2 m² (658.8 sf)	Certificate according to DIN EN 1176:	No.: Z2 16 01 10256 241 TÜV Product Service


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

Venus – Product Specification

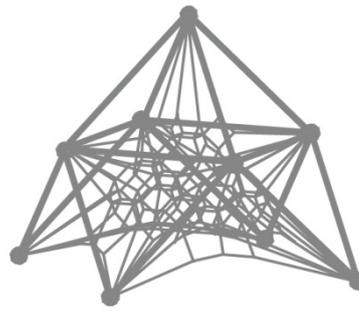

M 1:200

Technical Data.

The following text can also be used for tenders.

Tube framework:

Framework-steel tubes, Ø 60.3 mm (2 3/8"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Nodes:

Framework-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTM TT net tensioning system; securely closed with durable EPDM- caps

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene); rope-diameter Ø 16 mm (5/8")

Spatial netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands (no special tools required)




Berliner

Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com

Revision: March 2016

Page 2